




PATENT NO:202120856768.4

PATENT NO:202130238256.7

5 YEAR
WARRANTY



CE CB

RoHS
Compliant



LM-80

LED GARDEN LIGHT

GSL 08 SERIES | 01

COMPANY INTRODUCTION

Ningbo Greenlite Technology Co.,Ltd. is a manufacturer specializing in LED outdoor lighting. We are engaged in LED street lamp, floodlight lamp, tunnel lamp, mining lights, LED landscape lighting and outdoor flash lights, outdoor head lights and other outdoor series products.


Our company is located in China Die Casting Town – Ningbo Ninghai, 40 minutes to Ningbo airport by car, close to the port of Ningbo. It is quite convenient for both air and sea transportation.

Also, our factory is a member of Ninghai Die Casting Association and Ningbo lighting association, which brings us many advantages for die casting products, such as floodlight, street lights and so on.


The company insists that product quality is enterprise survival. Our goal is to provide high quality products with quite competitive price and excellent service to our customers. Our mission is to help each other get win-win business all the time.

We are committed to the outdoor green lighting products industry. Make outside world more beautiful, and Greenlitec is always here and ready for help.




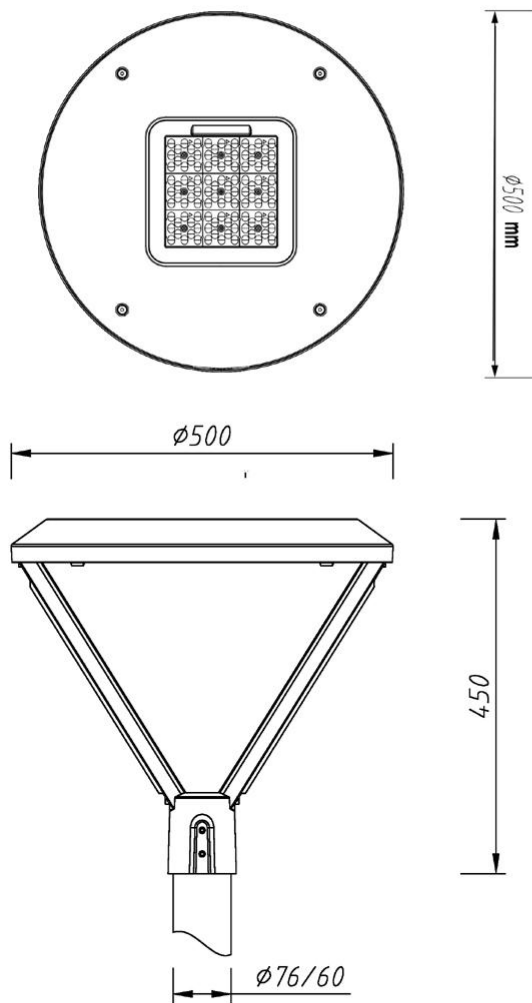


GSL08 D:Post top mounted

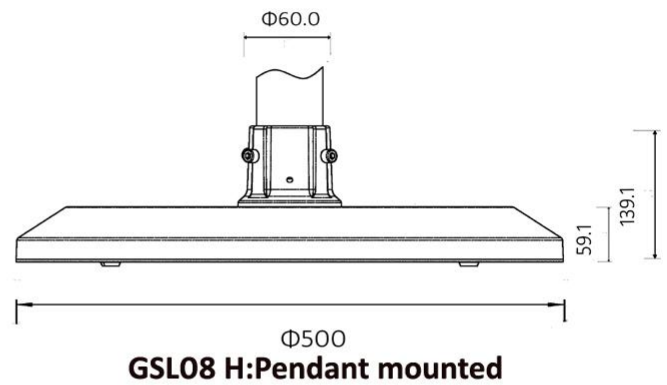

GSL08 H:Pendant mounted

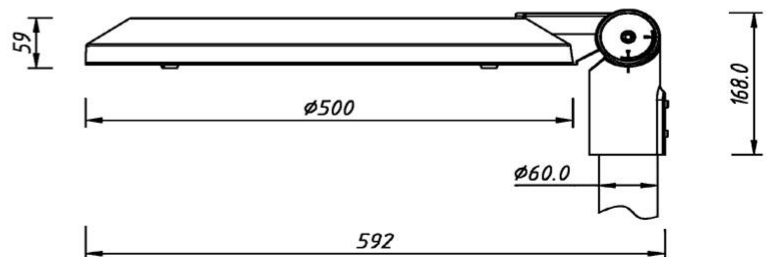

GSL08 S :Side entry mounted

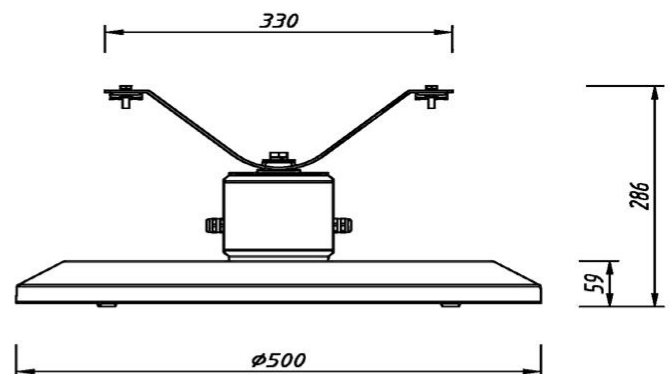

GSL08 L :Suspended mounted

Packing details

Model	PCS /Carton	Carton size (mm)	Volume(CBM)	GW(kg)
GSL08 L	1	590*500*150	0.044	6.00
GSL08 H	1	590*500*150	0.044	6.00
GSL08 S	1	590*500*150	0.044	6.00
GSL08 D	1	590*500*150	0.044	6.00

PRODUCT DATESHEET

GSL08 L							
Normal Wattage	20W	30W	40W	50W	60W	80W	100W
Power efficiency	130LM						
Lumen	2600LM	3900LM	5200LM	6500LM	7800LM	10400LM	13000LM
LED Spec	108units /Philips3030(20W-50W)				144units/Philips5050(60W-100W)		
Size(mm)	500*450						

GSL08 H							
Normal Wattage	20W	30W	40W	50W	60W	80W	100W
Power efficiency	130LM						
Lumen	2600LM	3900LM	5200LM	6500LM	7800LM	10400LM	13000LM
LED Spec	108units /Philips3030(20W-50W)				144units/Philips5050(60W-100W)		
Size(mm)	500*450						













GSL08 S							
Normal Wattage	20W	30W	40W	50W	60W	80W	100W
Power efficiency	130LM						
Lumen	2600LM	3900LM	5200LM	6500LM	7800LM	10400LM	13000LM
	108units /Philips3030(20W-50W)				144units/Philips5050(60W-100W)		
Size(mm)	500*450						

GSL08 D							
Normal Wattage	20W	30W	40W	50W	60W	80W	100W
Power efficiency							
Lumen	2600LM	3900LM	5200LM	6500LM	7800LM	10400LM	13000LM
LED Spec	108units /Philips3030(20W-50W)				144units/Philips5050(60W-100W)		
Size(mm)	500*450						





PRODUCT DATASHEET


Electrical Data	
Nominal Voltage	AC 100-240V 50/60HZ
LED	Philips Lumileds
Driver	Meanwell,INVENTRON,SOSEN,GEER or other brands on request
Power Factor (PF)	>0.9
THD	<15
SPD	10KV (Default) / 20KV (available on request)
Optics	Type II, Type III
Standard Deviation of Color Matching	<5 SDCM
CRI	Ra>70 (Default) / Ra>80
CCT	2700-6500 K
General Data	
Body Material	High pressure die-cast aluminum
Housing Color	Gray (Default) /Black (available on request)
Cover Material	Tempered glass
Lens Material	UV-resistant Polycarbonate
Working Environment	-40°C ~ +50°C, 10% ~ 90%RH
Lifespan L70 at 25 °C	>100,000 h
Mounting Type	Suspended mounted,Pendant mounted,Side entry mounted,Post top mounted
Dimmable	1-10V Dimming (Default) /Timer Dimming
Protection Class	Class I (Default) /Class II
Standards	CE, RoHS, ENEC, CB, LM79, LM80, TM-21, IP65 , IK10
Available on request	NEMA socket (3/5/7pins), ZHAGA socket, Short cap, Photocell, Motion sensor, Knife switch, NTC, OLC, Solar Compatible, DALI Dimming
Warranty	5 years

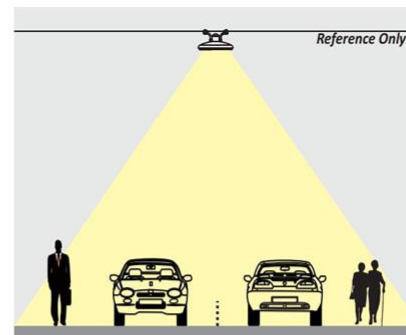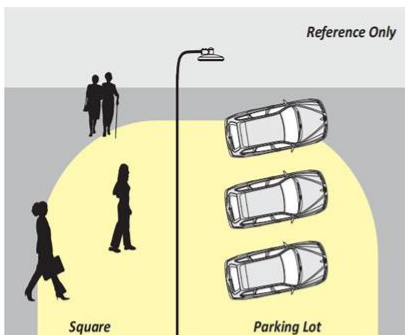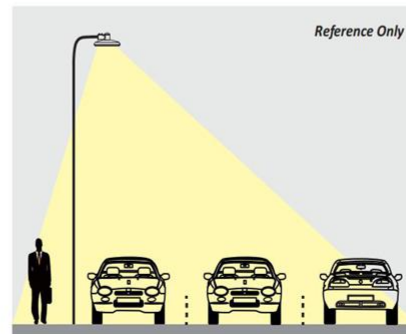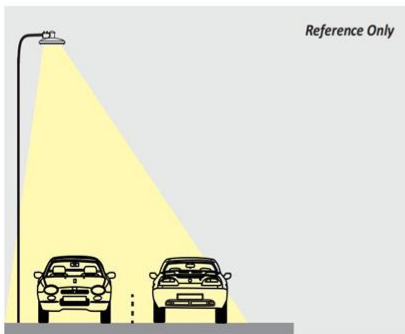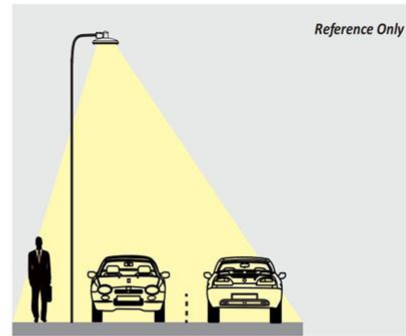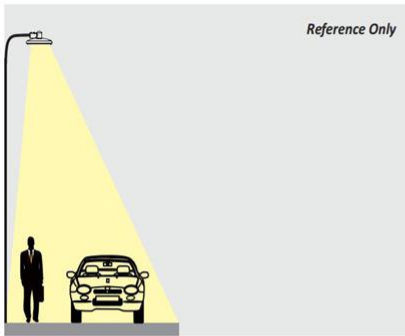


★ Post Top Mounted

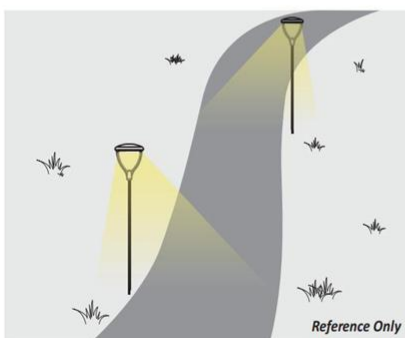

1M





2M





3M

Based on same mounting height, the lengthwise illumination area: 3M > 2M > 1M.

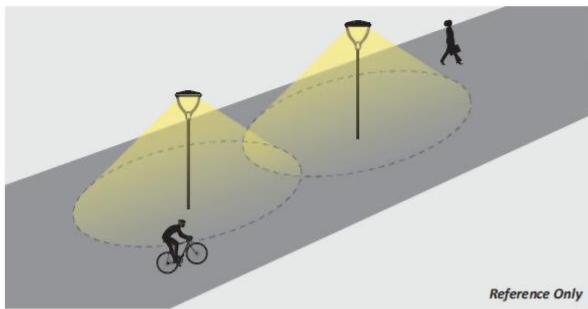


5S

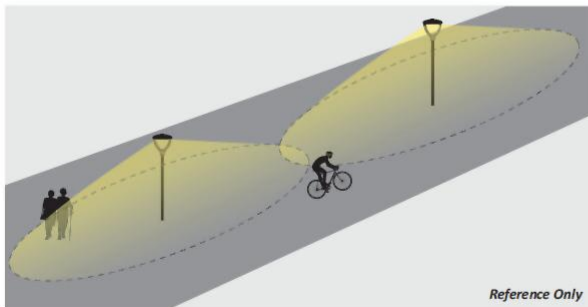


1M Symmetry


3030 Version




T2S53001




T3S53002



T3S53003




T2M53007




T3M53009


5050 Version




T2S55004




T3M55005



T3S55006



T2M55008



T3M55010

OPTIONAL ACCESSORIES



Photocell



Shorting Cap




NEMA Socket(3/5/7pin)



Motion Sensor



Smart Controller



Camera



NINGBO GREENLITE TECHNOLOGY CO., LTD.

ADD: No. 6-8, Xinxing Road, Chalu Industrial Zone, Ninghai, Ningbo, China

TEL: +86 - 574 - 86683126

EMAIL: sales@greenlitec.com

WEB: www.greenlitec.com

